


SD55ZS18

55" FHD Video Wall Display Unit (Ultra Narrow Bezel 1.8mm)

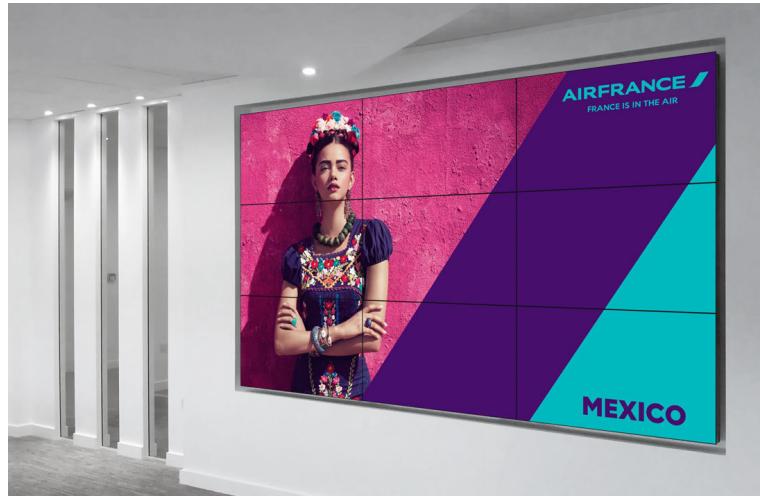

Technical Specification

Model

Model	SD55ZS18
-------	----------

Display

Diagonal Size	55"(16:9)
---------------	-----------

Panel Type	ADS
------------	-----

Resolution	1920×1080 (FHD)
------------	-----------------

Bezel Width	B2B: 1.8mm (Panel Bezel to Panel Bezel) A2A: 2.6mm (Active area to Active area)
-------------	--

Backlight	Direct LED
-----------	------------

Brightness	500 cd/m ²
------------	-----------------------

Contrast Ratio	1200:1
----------------	--------

Pixel Density	40dpi
---------------	-------

Viewing Angle	H178°, V178°
---------------	--------------

Response Time (G-to-G)	8ms
------------------------	-----

Color Depth	8bit (16.7M)
-------------	--------------

Color Temperature	10,000K
-------------------	---------

Surface Treatment	Haze 25%, 2H
-------------------	--------------

MTBF	50,000h
------	---------

Signals

Input	VGA(D-Sub)×1, DVI-D×1, HDMI×2, DP×1, RS232×1, Audio×1, IR×1
-------	---

Output	DP×1, RS232×1, Audio×1
--------	------------------------

Features:


- Industrial level ADS LCD panel, suitable for continuous 24h/7 operation
- Ultra-narrow 1.8mm B-to-B (Panel Bezel to Panel Bezel) design
- Anti-glare panel, vivid and memorable image quality
- Factory calibration technology for high color uniformity
- Built-in 3D noise reduction system and picture splicing function
- Abundant interfaces HDMI, DVI, VGA, DP (UHD daisy chain), RS232, Audio
- Up to 4K@60Hz signal input by DP IN or HDMI 1 interface, up to 4K@30Hz signal output by DP OUT interface
- Infrared, RS232 dual mode, supporting remote control by computer
- Professional thermal design to extend device lifespan
- Built-in power, low energy consumption, ultra-quiet
- Modular structure design, multiple installation modes
- Widely used in surveillance center, command center, meeting room, commercial display scenes, etc.





General

Power Supply	AC100V~AC240V, 50/60 Hz	
Power Consumption (Standby)	<0.5W	
Power Consumption (Typical)	180W	
Power Consumption (Max.)	195W	
Energy Efficiency Class (EU)	G	
Installation Mode	Floor-standing, wall-mounted	
VESA	600×400mm, M6	
Control Mode	Infrared, RS232 dual mode, supporting remote control by computer	
Net Weight	28kg (61.73lb)	
Gross Weight	33kg (72.75lb)	
Product Dimension (W×H×D)	1212.7mm×683.5mm×121.7mm (47.7"×26.9"×4.8")	
Package Dimension (W×H×D)	1360mm×945mm×280mm (53.5"×37.2"×11.0")	
Operating Environment	Temperature	0°C~+50°C
	Humidity	10%RH~80%RH (non-condensing)

Key Features



1.8MM SUPER NARROW BEZEL

ULTRA RESISTANT TO
BLACKENING DEFECTLANDSCAPE OR PORTRAIT
ORIENTATION

SLIM PROFILE






ANTI-GLARE IPS PANEL

24/7 COMMERCIAL GRADE

SILENT RUNNING

VESA COMPATIBLE MOUNTING

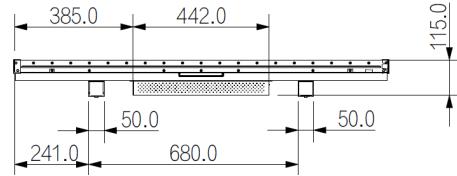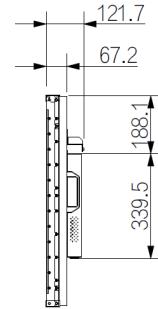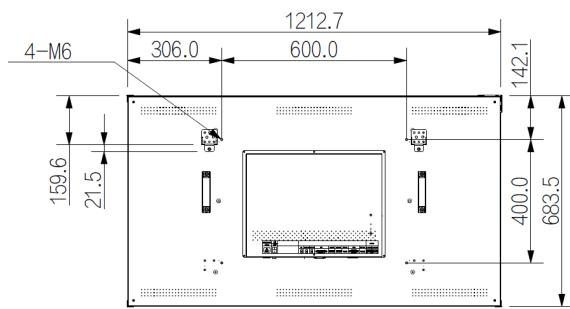

Dimensions(mm)